

Q.PS-AD2-2402F







saia-burgess

Control Systems and Components

Power supplies with 24 VDC output

- Input rated voltage 115...230 VAC
- Output: 24 VDC ±3% / 2,5 A
- Power Boost: 3,5 A for at least 3 minutes, up to 60 °C
- Short-circuit protection
- Overload protection
- Strong overload without switch-off
- IP 20
- Mounting on DIN rail
- Extremely small size

Product Range				
Figure	Input	Output	Protection	Features
 Q.PS-AD1	Single phase 24 VAC / 40 VDC	24 VDC, 3 A 24 VDC, 5 A 24 VDC, 7 A	Short circuit Overload	
 Q.PS-AD2-24xxF	Single phase 115...240 VAC	24 VDC, 1.5...3 A 24 VDC, 5...7.5 A 24 VDC, 10...14 A	Short circuit Overload Overvoltage	Adjustable output voltage 22...27 VDC
 Q.PS-AD3	Double-phase 400...480 VAC	24 VDC, 5 A	Short circuit Overload Overvoltage	Adjustable output voltage 22...26 VDC
 Q.PS-ADB	Single phase 110...230 VAC / 24 VDC battery	24 VDC, 5 A	Short circuit Overload Overvoltage	Adjustable charging current 1...5 A, battery diagnostic and different charging modes

Applications

Control panels, where 24 VDC is required to supply PLC's, actors, sensors etc. But also power demanding loads such as solenoid valves, motors, lamps, etc. Can be used in applications for:

- Building automation
- Industrial automation
- Infrastructure plants, such as water or sewage treatment
- Machineries
- Material handling
- etc.

Norms and certifications

- The CE mark according to 2004/108/EC Electromagnetic Compatibility and low voltage directive 2006/95/EC

Electrical safety

- According to IEC/EN60950 (VDE0805) and EN50178 (VDE0160) for assembling devices. The unit must be installed according to IEC/EN60950.

EMC Generic

- Immunity according to EN61000-6-2
- Emission according to EN61000-6-4

Functions

Q.PS-AD2-2402F	
Input data	
Input voltage	115...230 VAC
Input Voltage Range	90...264 VAC
Inrush Current (Vn – In Load)	≤ 7 A ≤ 5 ms
Frequency	47...63 Hz ± 6%
Input Current (Input Rated Voltage)	1.0...0.7 A
Internal Fuse	4 A
External Fuse	Fast 16 A
Output data	
Output Voltage (Vn) / Nominal Current (In)	24 VDC ±3% / 2,5 A
Adjustment range (V _{adj})	22...27 VDC
Turn-On delay after applying mains voltage	2 sec (max)
Start up with capacitive load	≤ 50.000 µF
Continuous running current:	
Max. continuous current at ≤ 40 °C	2 A (115 VAC), 3 A (230 VAC)
Max. continuous current at ≤ 50 °C	1.5 A (115 VAC), 2.5 A (230 VAC)
Power reserve (power boost) (within 3 min. ≥ 60 °C)	3.5 A
Short-circuit current (I _{cc})	7 A
Hold-up Time (at 100...240 VAC)	in general 20 ms
Residual Ripple	≤ 80 mVpp
Minimum load	No
Efficiency (at 50% In)	≥ 88%
Short-circuit protection	Yes
Overload protection	Yes
Over Voltage Output protection	Yes (max 35 VDC)
Parallel connection	Yes
Climatic data	
Ambient Temperature (operation)	-25...+70 °C (De rating >50 °C, 2.5%/°C)
Ambient Temperature (storage)	-40...+85 °C
Humidity: no moisture condensation	95% at +25°C
General data	
Isolation Voltage (Input/Output)	3000 VAC
Input / Ground isolation PE	1605 VAC
Output / Ground isolation PE	500 VAC
Degree of protection	IP 20
Pollution Degree Environment	2
Protection class	I, with PE connected
Dimension (w x h x d)	50 x 120 x 50 mm
Weight	approx 0.30 kg

Contact: Switzerland and International



Saia-Burgess Controls AG
 Bahnhofstrasse 18 | CH-3280 Murten / Switzerland
 T +41 (0)26 672 72 72 | F +41 (0)26 672 74 99
 pcd@saia-burgess.com | www.saia-pcd.com

Product support and this document in DE, FR, IT, on the website: www.saia-support.com


4 519 5131 0b 06.2012 Subject to change without notice.

Output characteristics


Output Derating Curve

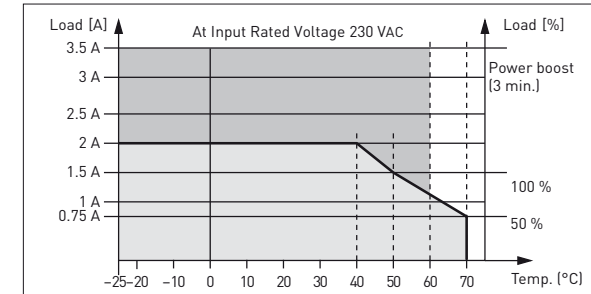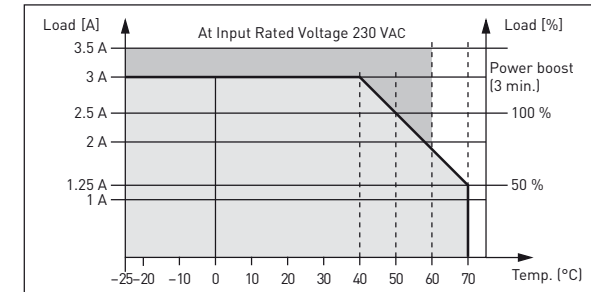

Output Characteristic Curve U/I

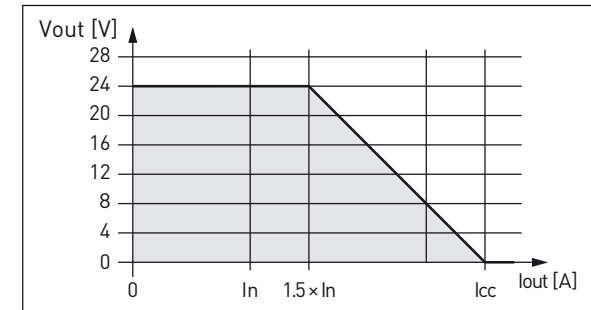

Dimensions

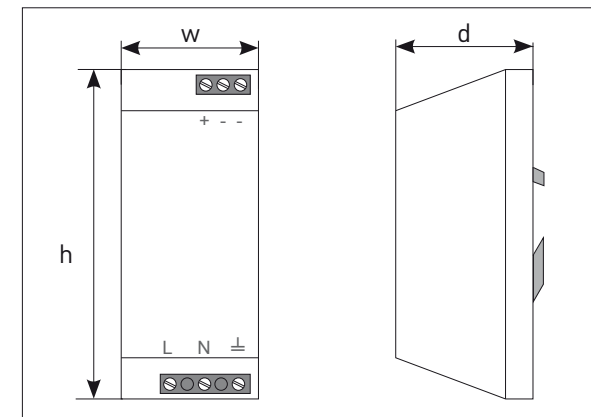

Mounting Instruction & Users Guide

1 Phase Power supplies Q.PS-AD2-24xxF

Primary switched power supply: Thank you for having chosen one of our products for your work. We are certain that it will give the utmost satisfaction and be a notable help on the job.

Application: The power supplies Q.PS-AD2-24xxF can be used in areas with extreme industrial environment, and complies with the latest technical standard. Before working with the unit, read these instructions carefully and completely. All these power supplies are single output, IP20 and have Mounting DIN Rail IEC60715/TH35. Class 1 isolation devices suitable for SELV and PELV solutions.

Installation



WARNING

Explosion Hazard. Do not disconnect equipment unless power has been switched off or the area is known to be non-hazardous.

Explosion Hazard. Substitution of components may impair suitability for class 1, Division 2.

Switch off the system before connecting the module. Never work on the machine when it is live. The device must be installed in according with EN60950. The device must have a suitable isolating facility outside the power supply unit, via which can be switched to idle. Danger of fatal Injury!

Connection:

Cable Connection: The following cable cross-sections may be used:

	Solid (mm ²)	Stranded (mm ²)	AWG	Torque (Nm)	Stripping Length
Input	0.2÷2.5	0.2÷2.5	24 ... 14	0.5 ... 0.6Nm	7 mm
Output:	0.2÷2.5	0.2÷2.5	24 ... 14	0.5 ... 0.6Nm	7 mm
Signal:	0.2÷2.5	0.2÷2.5	24 ... 14	0.5 ... 0.6Nm	7 mm

The connection is made by screw type 2.5mm² terminal blocks. Use only copper cables that are designed for operating temperatures of >75 °C. Wiring terminals shall be marked to indicate the proper connection for the power supply.


Input: The input connection is made by L, N, PE.

Output: 24VDC is made via the + (+), - (-).

Signalling


Jumper Settings	Standard Conditions "LED DC ok"	Overflow conditions "LED DC ok"
MANUAL RESET:	Lights up permanently when the output voltage is OK.	Switches off when there is an overload
HICCUP MODE:		Blinks when there is an overload
CONTINUOUS OUT MODE:		Switches off when there is an overload

Rail Mounting:

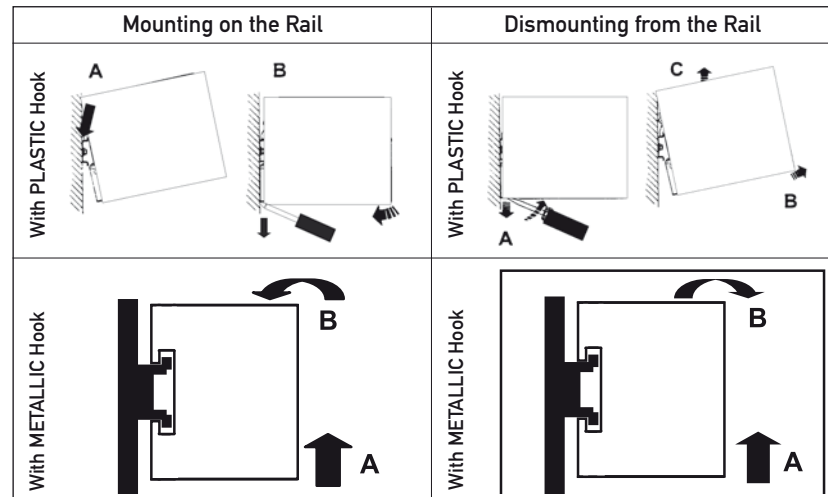


Other modules must have a minimum vertical distance of 10 cm to this power supply in order to guarantee sufficient auto convection. Depending on the ambient temperature and load of the device, the temperature of the housing can become very high!

Connection:



With Q.PS-AD2-2402F and Q.PS-AD2-2405F

Parallel Connection for Redundancy or Increased capacity:



With Q.PS-AD2-2410F
Put a jumper for parallel connection easy

To result a good current share between all devices in parallel, adjust the output voltage in a tolerance of ± 20 mV. Therefore applying 1 ... 2 A load to adjust the output-voltage. Then connect them in parallel. Use only power supplies of the same model.

Power Good Output Function:

(only on Q.PS-AD2-2405F and Q.PS-AD2-2410F)

The NC contact open any time the output voltage level goes below 20 VDC $\pm 5\%$. With this Power Good relay the output voltage can continuously be monitored. The maximum rates which can be switched are 30 VDC and 1 A.

Protection:


On the primary side: the device is equipped with an internally fuse. If the internal fuse is activated, it is most probable that there is a fault in the device. If happen, the device must be checked in the factory.

On the secondary side: the device is electrically protected against: Over-load, output over-voltage and short circuit automatically. It is not possible to set the overload mode on the Q.PS-AD2-2402F.

Characteristic Curves


Short circuit and overload

The output of the device is electrically protected against overload and short circuit. At nominal voltage the device can supply 1.5 the nominal Current without switching off. In the case of higher overload, the operating point traces the curve illustrated in figure. As the overload increases, the output voltage is reduced until zero.



Thermal behaviour

The rated maximal air temperature @ nominal current is 60 °C (the Q.PS-AD2-2402F 50 °C). For ambient temperature above 60 °C, the output current must be reduced by 2.5% per Kelvin increase in temperature. At the temperature of 70 °C, the output current will be 3/4 × I_n (by the Q.PS-AD2-2402F I_n/2). The equipment does not switch off in case of ambient temperature up to 70 °C or thermal overload. The devices are protected for excess temperature conditions. In conditions where the power-supply inside temperature is over 70 °C will the device shut-down the output and will be automatically restarted when the temperature inside the power-supply is decreased.

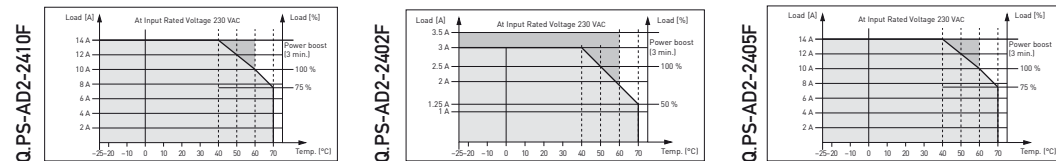

Standards and Certification

Electrical Safety:

Assembling device: UL508, IEC/EN60950 (VDE0805) and

EN50178 (VDE0160)

Isolation according: IEC/EN60950

Input/Output separation: SELV EN60095-1 and PELV EN60204-1.

Double or reinforced insulation

EMC Standards (Surge, Transient Immunity):

Immunity: EN61000-4-2, EN61000-4-3, EN61000-4-4,

EN61000-4-5, EN61000-4-6, EN61000-6-2

Emission: EN61000-6-4, EN61000-3-2

Standards Conformity:

Safety of Electrical Equipment Machines: EN60204-1.



In according to EMC2004/108/EC and EMC93/68/EEC
Low voltage directive 2006/95/E